

# MaxFlo XL™

**EXPERT LINE**



## MAKES LIFE EASIER

- **Optimised design and hydraulics**
- **Twist-lock opening cover** for easy maintenance
- **Union fittings provided** for easy installation
- Recommended for pools **up to 100 m<sup>3</sup>\***

\* Calculation based on 6 hours turnover






Easy-to-service design provides simple installation



See-through strainer cover



Drain plugs for an easy wintering

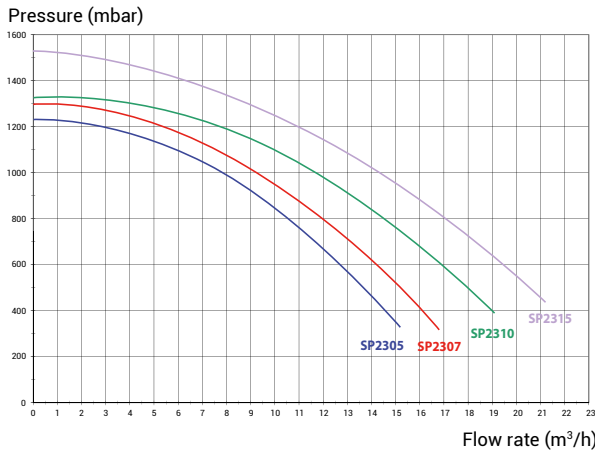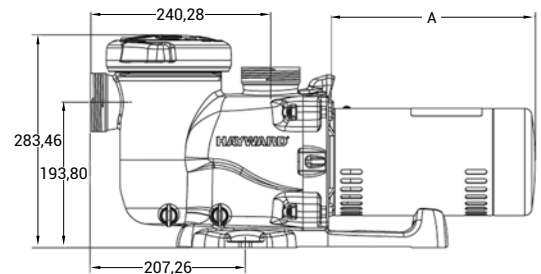

### Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304, suitable for salt water
Motor specifications	Class F, IP55, 50Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC

	Type	Dim. A	Weight	I/O	Flow rate*	Input Power P1	Output Power P2	Amperage	Item
SINGLE PHASE MAXFLO XL™	1/2 HP	220 mm	12.9 kg	50 mm	10.5 m³/h	640 W	430 W	3 A	SP2305XE81
	3/4 HP	220 mm	12.9 kg	50 mm	12 m³/h	640 W	430 W	3 A	SP2307XE111
	1 HP	247 mm	13.9 kg	50 mm	14.5 m³/h	975 W	720 W	4.3 A	SP2310XE161
	1.5 HP	247 mm	14.07 kg	50/63 mm	17 m³/h	1100 W	790 W	5 A	SP2315XE221
THREE PHASE MAXFLO XL™	3/4 HP	216 mm	11.4 kg	50 mm	12.8 m³/h	640 W	430 W	2.1/1.2 A	SP2307XE113
	1 HP	216 mm	12.02 kg	50 mm	14.5 m³/h	975 W	690 W	3/1.7 A	SP2310XE163
	1.5 HP	247 mm	13.2 kg	50/63 mm	16.2 m³/h	900 W	750 W	2.8/1.6 A	SP2315XE223

\* under 8 m water column pressure

